




Conveyor Safety Switch

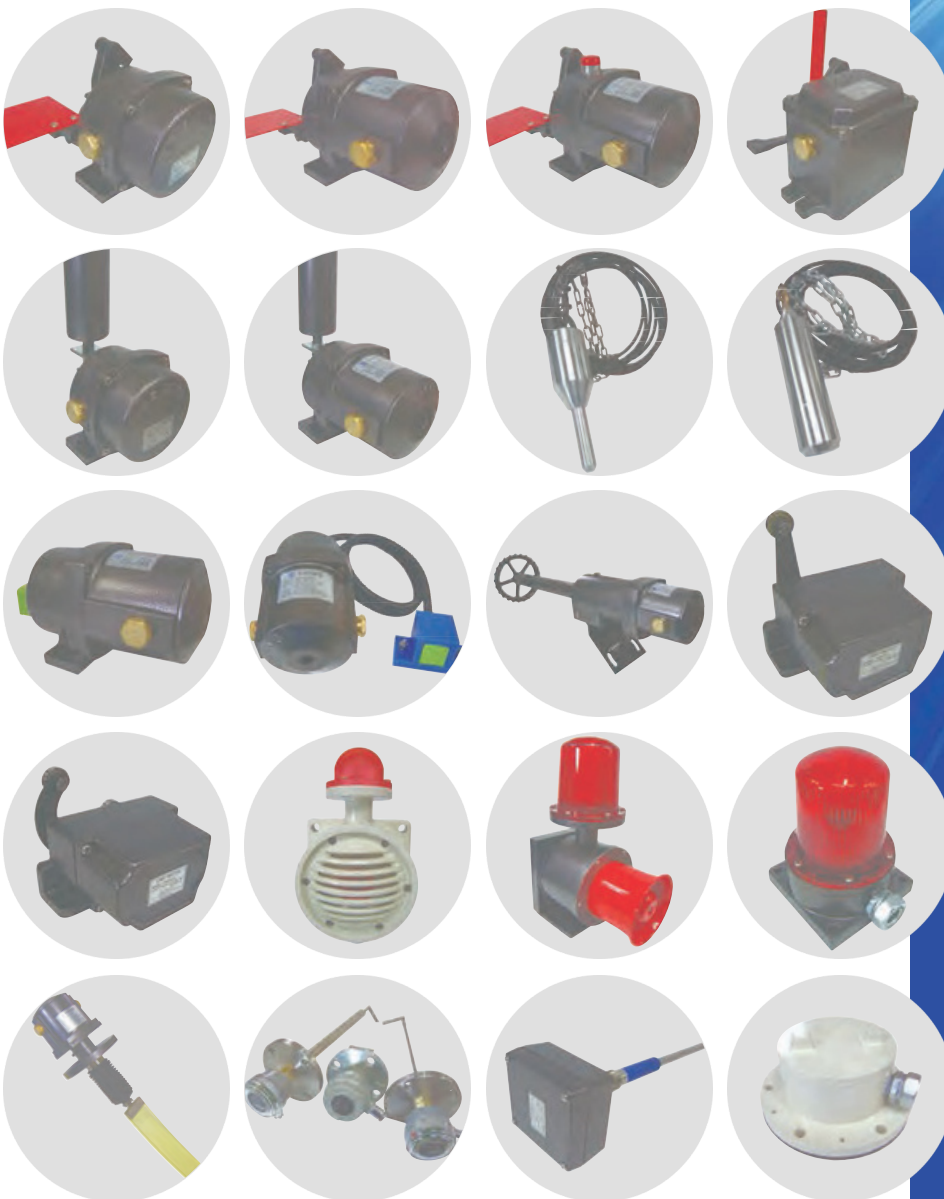

PULL CORD SWITCH
BELT SWAY SWITCH
BELT ALIGNMENT SWITCH
CHUTE SWITCH
SPEED SWITCH
LIMIT SWITCH
WARNING HORN
WARNING HORN WITH LIGHT
INDICATING LIGHT
FLOW SWITCH
BELT RIP SWITCH
PADDLE SWITCH
CAPACITY LEVEL SWITCH
DIAPHRAM LEVEL SWITCH
PULL CORD SWITCH
HARDWEAR(ACC)

TEL : 024 - 76510250 | WA : 0822-2422-5165




DSS Co.,Ltd.

Daesung Switch


PULL CORD SWITCH

DBSS -10



■ SPECIFICATIONS

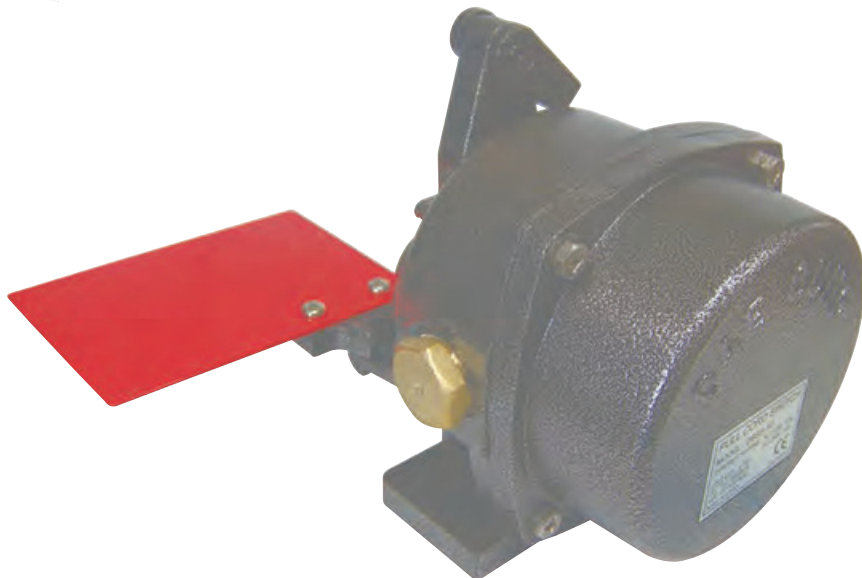

TYPE : MANUAL RETURN
 CONTACT CAPACITY : 15A 125VAC.
 10A 250VAC. 15A 14VDC
 NUMBER OF CONTACTS : SPDT×2EA
 REQUIRED FORCE OF PULL CORD : 7±1Kg
 CABLE ENTRY : PF 3/4"×2EA
 ACTIVATE ON PULL OF THE ROPE
 IN EITHER DIRECTION
 RED PAINTED MECHANICAL INDICATOR
 PROTECTION : IP65 (IEC-60947-5-1)
 CE CERT (TUV)
 WEIGHT : 2.5Kg
 MOUNTING BOLT & NUT /WASHER (M8)
 COLOR : HAMMERTON FE411

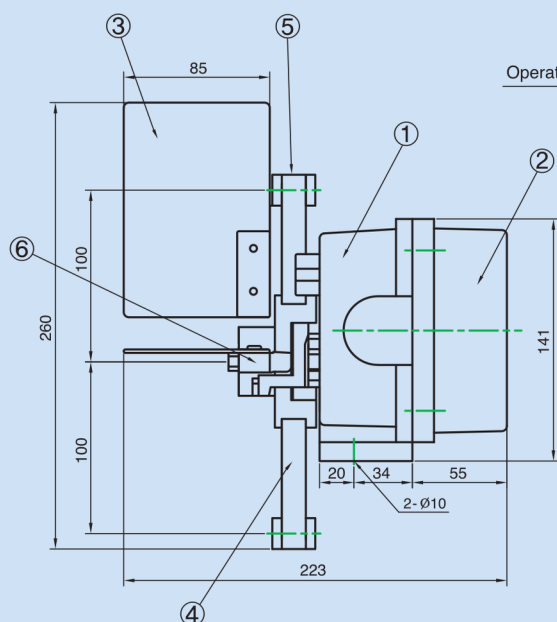

Operating Indicator Plate

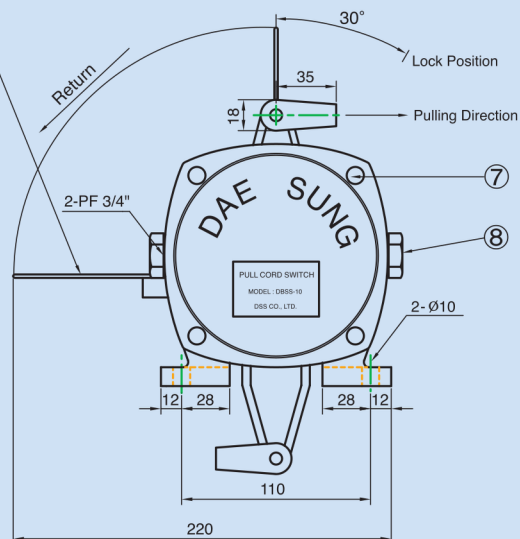


- | | |
|-------------------|--------------------|
| ① BODY | ⑤ LEVER LINK |
| ② COVER | ⑥ PLATE HOLDER |
| ③ INDICATOR PLATE | ⑦ CONNECTION BOLT |
| ④ LEVER | ⑧ CABLE GRAND HOLE |

DBSS-10EX (EXPLOSION PROOF)




■ SPECIFICATIONS

TYPE : MANUAL RETURN
 CONTACT CAPACITY : 15A 125VAC.
 10A 250VAC. 15A 14VDC
 NUMBER OF CONTACTS : SPDT×2EA
 REQUIRED FORCE OF PULL CORD : 7 ± 1 Kg
 CABLE ENTRY : NPT 3/4"×2EA
 ACTIVATE ON PULL OF THE ROPE
 IN EITHER DIRECTION
 RED PAINTED MECHANICAL INDICATOR
 PROTECTION : EXPLOSION PROOF
 (EX tD A22 T85°CIP66)
 WEIGHT : 3.5Kg
 MOUNTING BOLT & NUT /WASHER (M8)
 COLOR : HAMMERTON FE411

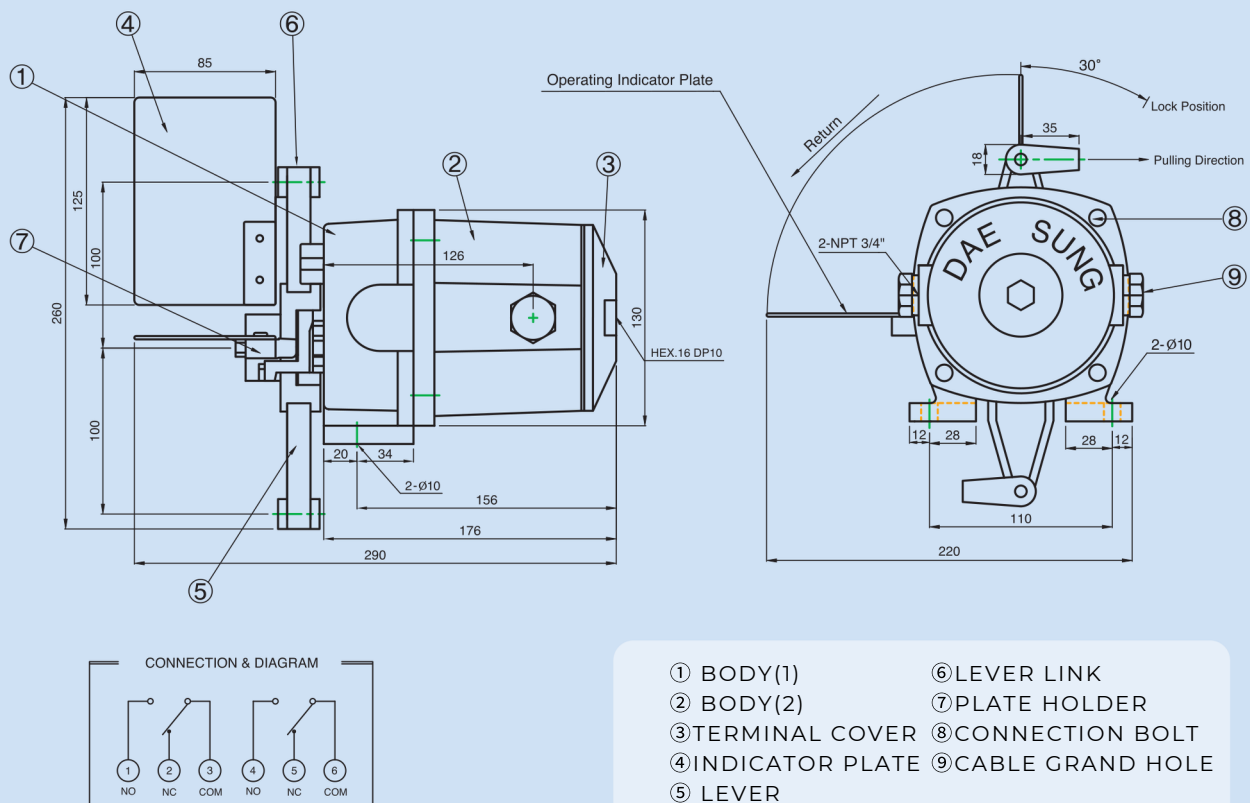




PULL CORD SWITCH

DBSS-10L

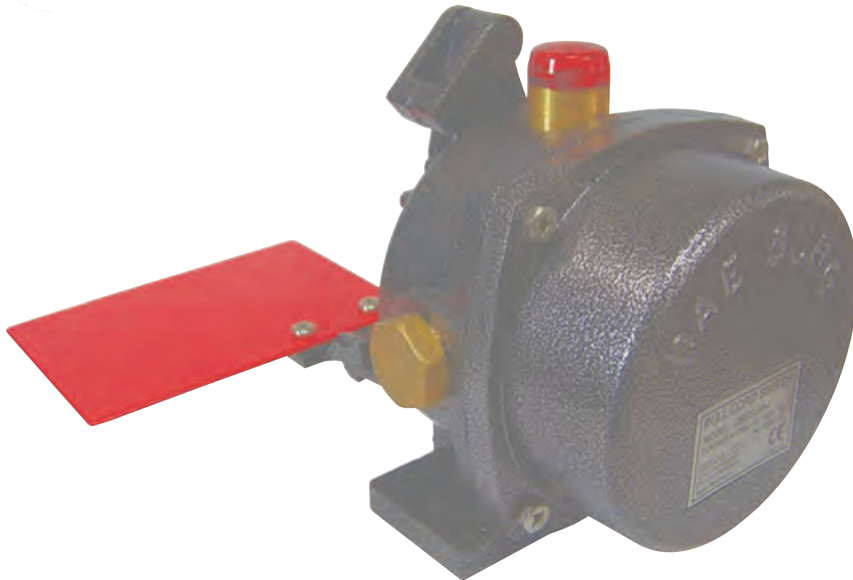


■ SPECIFICATIONS

TYPE : MANUAL RETURN &
FLICKERING LAMP(NC TYPE)
CONTACT CAPACITY : 15A 125VAC.
10A 250VAC. 15A 14VDC
NUMBER OF CONTACTS : SPDT×2EA
REQUIRED FORCE OF PULL CORD : 7±1Kg
CABLE ENTRY : PF 3/4"×2EA
ACTIVATE ON PULL OF THE ROPE
IN EITHER DIRECTION
RED INDICATING LIGHT
RED PAINTED MECHANICAL INDICATOR
PROTECTION : IP65 (IEC-60947-5-1)
CE CERT (TUV)
WEIGHT : 2.5Kg
MOUNTING BOLT & NUT /WASHER (M8)
COLOR : HAMMERTON FE411

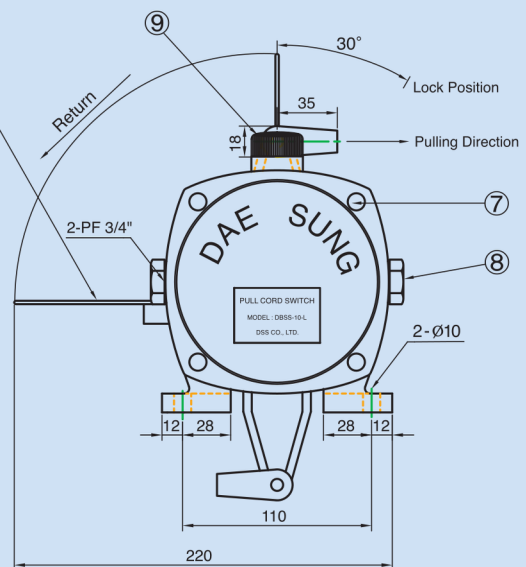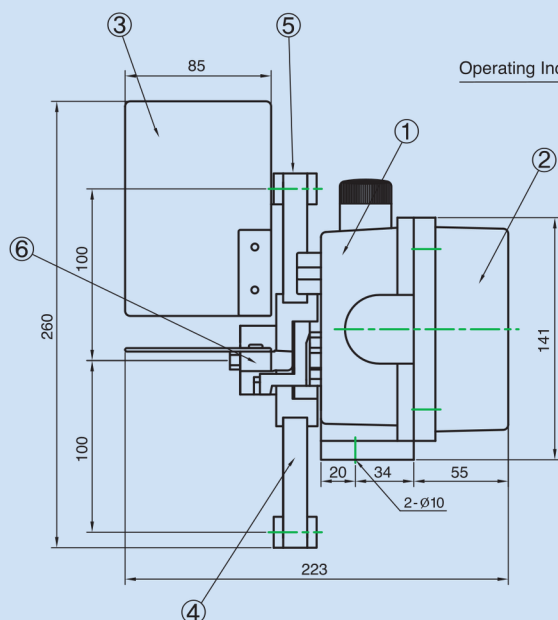



- | | |
|-------------------|--------------------|
| ① BODY | ⑥ PLATE HOLDER |
| ② COVER | ⑦ CONNECTION BOLT |
| ③ INDICATOR PLATE | ⑧ CABLE GRAND HOLE |
| ④ LEVER | ⑨ LAMP |
| ⑤ LEVER LINK | |

DBSS-10EX-L (EXPLOSION PROOF)

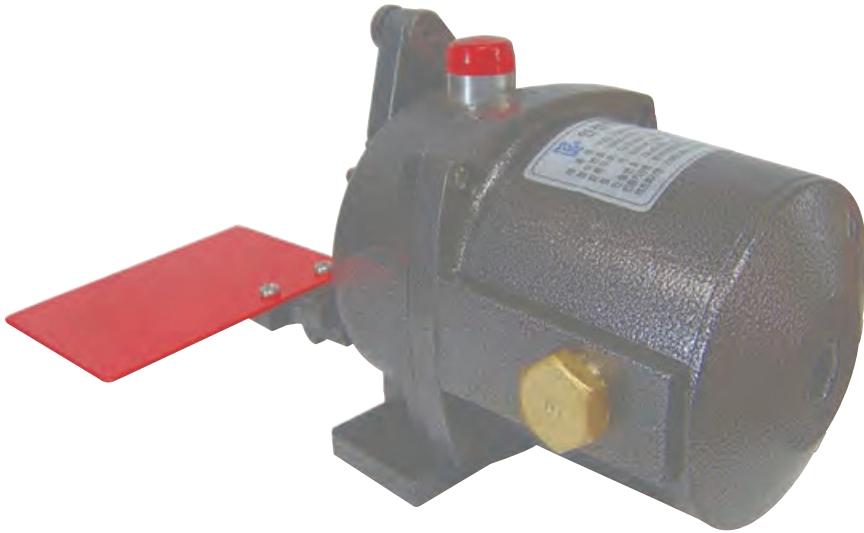

■ SPECIFICATIONS

TYPE : MANUAL RETURN &
FLICKERING LAMP(NC TYPE)
CONTACT CAPACITY : 15A 125VAC.
10A 250VAC. 15A 14VDC
NUMBER OF CONTACTS : SPDT×2EA
REQUIRED FORCE OF PULL CORD : 7±1Kg
CABLE ENTRY : NPT 3/4"×2EA
ACTIVATE ON PULL OF THE ROPE
IN EITHER DIRECTION
RED INDICATING LIGHT
RED PAINTED MECHANICAL INDICATOR
PROTECTION : EXPLOSION PROOF
(EX tD A22 T85°CIP66)
WEIGHT : 3.5Kg
MOUNTING BOLT & NUT /WASHER (M8)
COLOR : HAMMERTON FE411

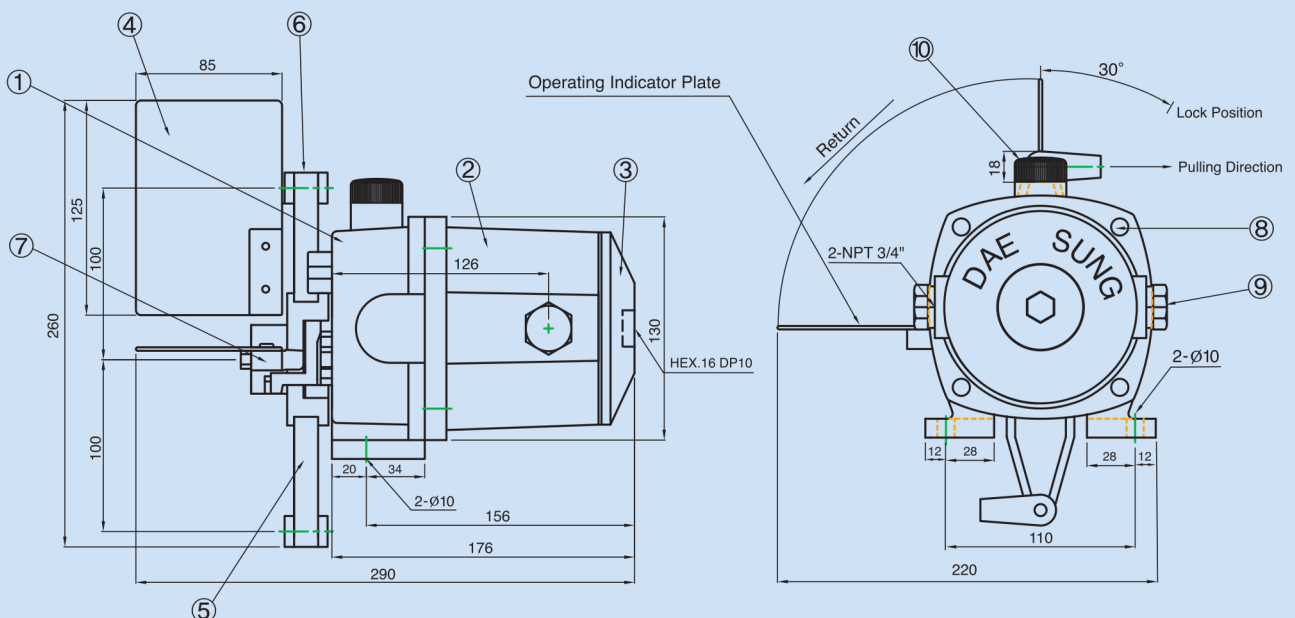

- | | |
|-------------------|--------------------|
| ① BODY(1) | ⑥ LEVER LINK |
| ② BODY(2) | ⑦ PLATE HOLDER |
| ③ TERMINAL COVER | ⑧ CONNECTION BOLT |
| ④ INDICATOR PLATE | ⑨ CABLE GRAND HOLE |
| ⑤ LEVER | ⑩ LAMP |




PULL CORD SWITCH

DBSS-10K



■ SPECIFICATIONS

TYPE : BUTTON RESET
 CONTACT CAPACITY : 15A 125VAC.
 10A 250VAC. 15A 14VDC
 NUMBER OF CONTACTS : SPDT×2EA
 REQUIRED FORCE OF PULL CORD : 7 ± 1 Kg
 CABLE ENTRY : PF 3/4"×2EA
 ACTIVATE ON PULL OF THE ROPE
 IN EITHER DIRECTION
 RED PAINTED MECHANICAL INDICATOR
 WEIGHT : 2.5Kg
 COLOR : HAMMERTON FE411
 PROTECTION : IP65 (IEC-60947-5-1)
 MOUNTING BOLT & NUT / WASHER (M8)
 CE CERT (TUV)

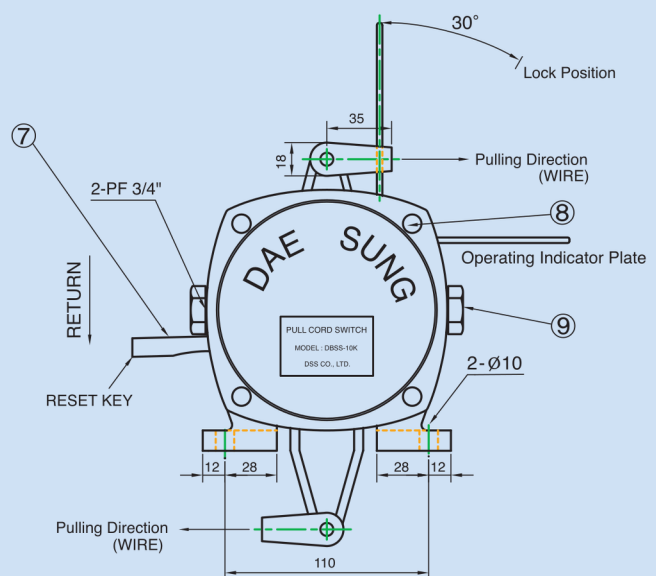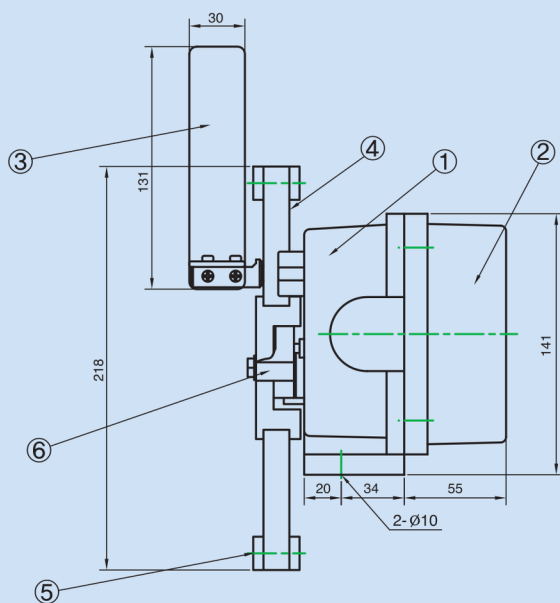




- | | |
|-------------------|--------------------|
| ① BODY | ⑥ PLATE HOLDER |
| ② COVER | ⑦ RESET KEY |
| ③ INDICATOR PLATE | ⑧ CONNECTION BOLT |
| ④ LEVER | ⑨ CABLE GRAND HOLE |
| ⑤ LEVER LINK | |



DBSS-10EX-K (EXPLOSION PROOF)

■ SPECIFICATIONS

TYPE : BUTTON RESET
 CONTACT CAPACITY : 15A 125VAC.
 10A 250VAC. 15A 14VDC
 NUMBER OF CONTACTS : SPDT×2EA
 REQUIRED FORCE OF PULL CORD : 7 ± 1 Kg
 CABLE ENTRY : NPT 3/4"×2EA
 ACTIVATE ON PULL OF THE ROPE
 IN EITHER DIRECTION
 RED PAINTED MECHANICAL INDICATOR
 PROTECTION : EXPLOSION PROOF
 (EX tD A22 T85°CIP66)
 WEIGHT : 3.5Kg
 MOUNTING BOLT & NUT /WASHER (M8)
 COLOR : HAMMERTON FE411

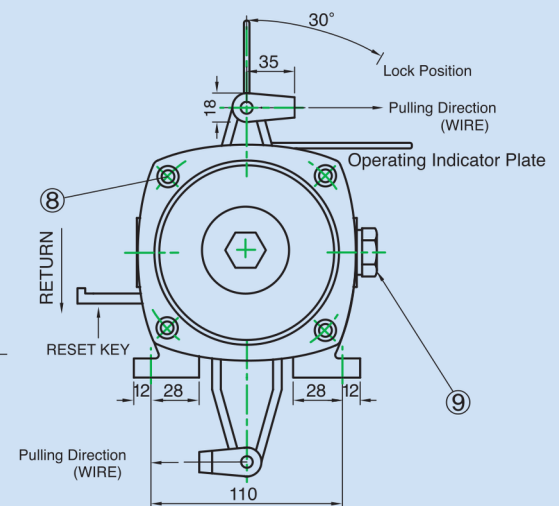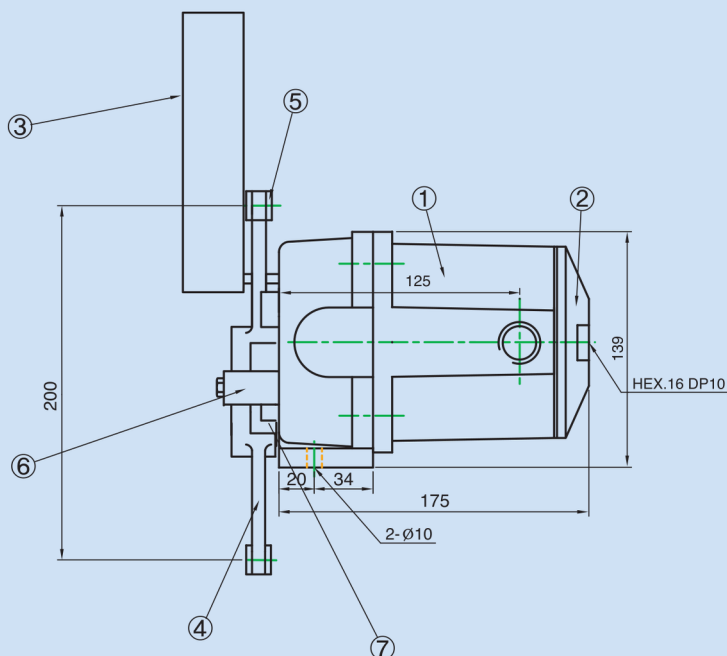

- | | |
|-------------------|--------------------|
| ① BODY | ⑥ PLATE HOLDER |
| ② COVER | ⑦ RESET KEY |
| ③ INDICATOR PLATE | ⑧ CONNECTION BOLT |
| ④ LEVER | ⑨ CABLE GRAND HOLE |
| ⑤ LEVER LINK | |




PULL CORD SWITCH



DBSS-10-U DBSS-10-U-KM

■ SPECIFICATIONS

TYPE : BUTTON RESET & TOP COVER STYLE
 CONTACT CAPACITY : 15A 125VAC.
 10A 250VAC. 15A 14VDC
 NUMBER OF CONTACTS : SPDT×2EA
 NON-CONTACT : SPDT(DBSS-10-U-KM)
 REQUIRED FORCE OF PULL CORD : 7 ± 1 Kg
 CABLE ENTRY : NPT 3/4"×2EA
 ACTIVATE ON PULL OF THE ROPE
 IN EITHER DIRECTION
 RED PAINTED MECHANICAL INDICATOR
 PROTECTION : IP 65
 WEIGHT : 3.5Kg
 MOUNTING BOLT & NUT /WASHER (M8)
 COLOR : HAMMERTON FE411

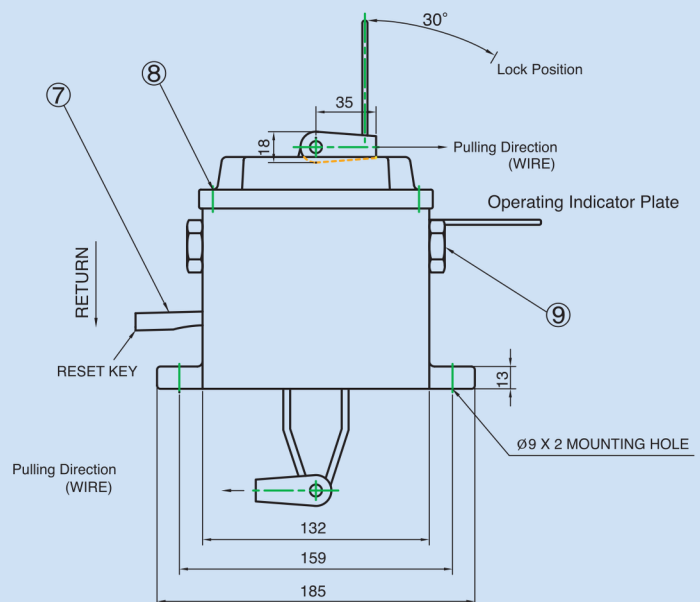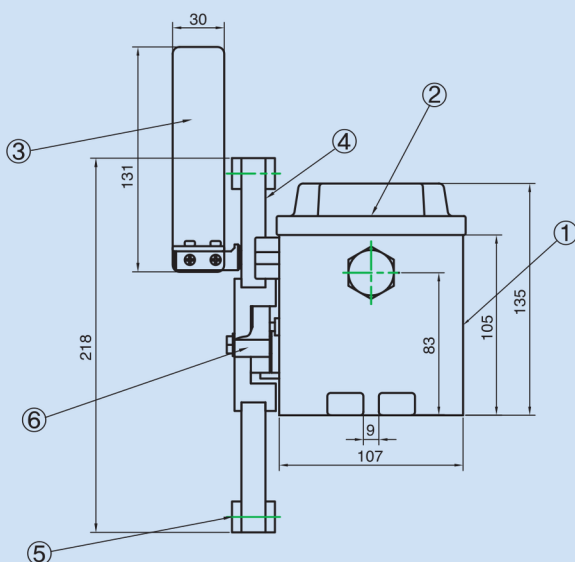

- | | |
|-------------------|--------------------|
| ① BODY | ⑥ PLATE HOLDER |
| ② COVER | ⑦ RESET KEY |
| ③ INDICATOR PLATE | ⑧ CONNECTION BOLT |
| ④ LEVER | ⑨ CABLE GRAND HOLE |
| ⑤ LEVER LINK | |